



THE SHIELD

The StormTank Shield provides a low-cost solution for stormwater pretreatment by reducing pollutant discharge through gross sediment removal and oil/water separation. Once the Shield is installed, any contaminants with a density less than water are prevented from exiting the inlet. This improves treatment efficiency by increasing the flow length and time of concentration vital to particle settling.



ANTI-SIPHON VENT

Vortexes and siphoning are prevented by the built-in vent, which requires no additional parts or connections.




ACCESS PORT

The access port and slim profile simplify the cleaning process and ensure that nothing obstructs the discharge.



HAND GRIP

The built-in hand grip makes the Shield easy to handle during the installation process.



EASY INSTALLATION

Pre-drilled mounting holes allow the Shield to be easily fastened over the outlet pipe. Conveniently available in 18-, 24-, and 30-inch size



ADDITIONAL STORMTANK PRODUCTS



THE PACK

The Stormtank Pack is the light-duty solution for subsurface stormwater management.




THE MODULE


The StormTank Module is a subsurface stormwater storage unit load-rated for use under surfaces such as parking lots, athletic fields, and parks.

REMOVAL EFFICIENCY CURVES

STKS-18, 4'x2' Tank, 1/16" Particles @ 200 mg/L

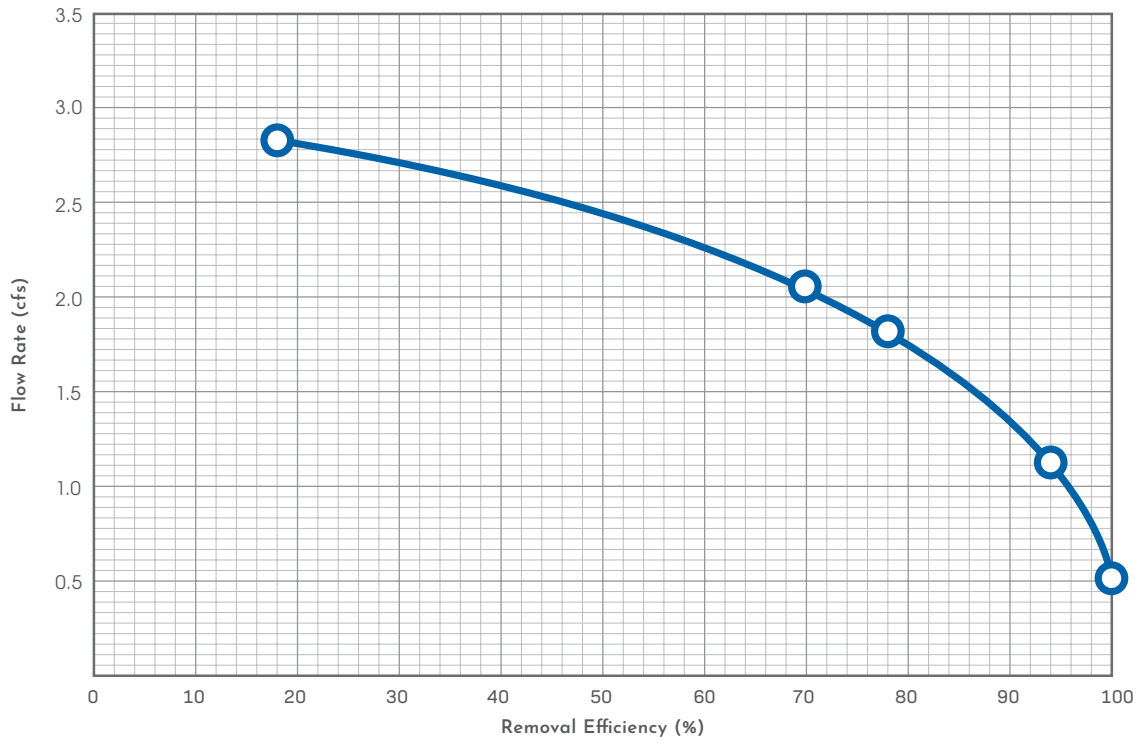

STKS-18, 4'x4' Tank, 1/16" Particles @ 200 mg/L

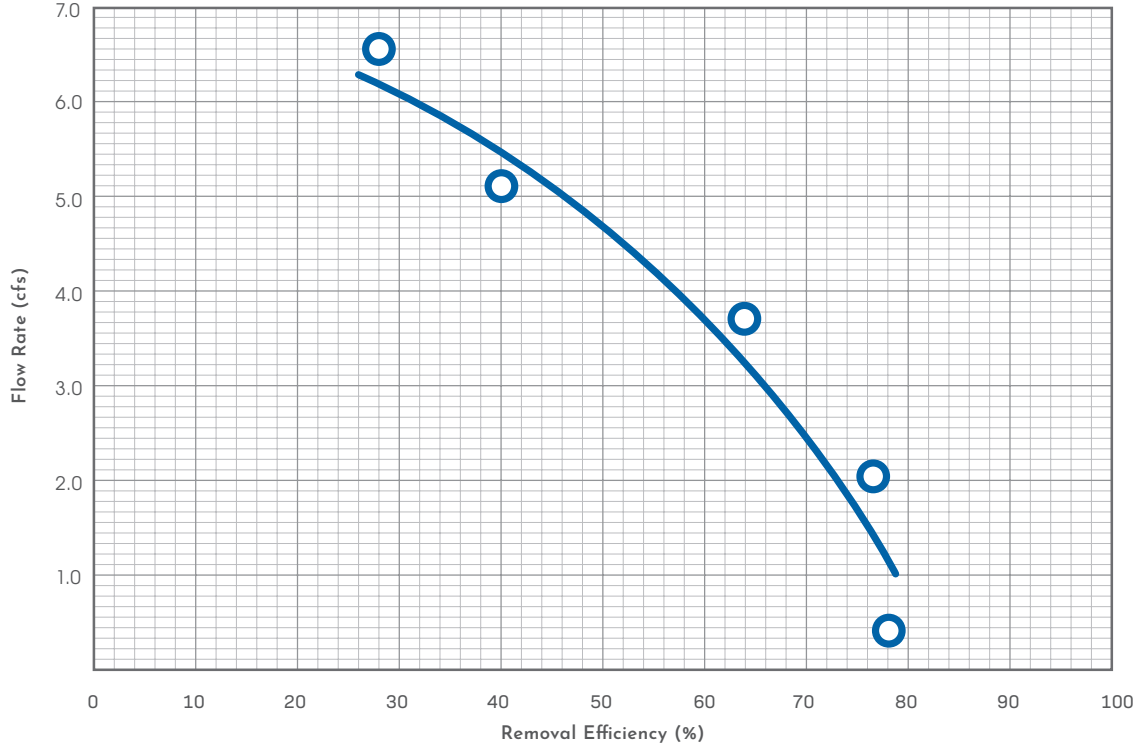

STORMTANK.COM
info@stormtank.com
+1.610.374.5109